

## Description

Indoor drop coaxial cable - 75 Ohm  
Indoor installation cable (Screening Class B)



## Data Sheet

SAT501



Ø	0,80	3,50	3,60	4,00	5,00
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(PVC)

## Class CPR acc. to UE 305/2011 (DoP)

E<sub>ca</sub>

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-4

## Construction data

Inner conductor of plain copper	(Cu)	Ø 0,80 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 3,50 ± 0,10	mm
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		47	%
Diameter over Braid		Ø 4,00	mm
Outer sheath of Polyvinylchloride - white (PVC) - lead-free	(PVC)	Ø 5,00 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL SAT 501 MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V)**  
gggaa(n) m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	8,87	kg/km
Total weight of cable	24,20	kg/km
Minimum bending radius (single/repeated bending)	25/50	mm
Maximum cable pulling strength	90	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		35	Ohm/km
Outer conductor resistance		26	Ohm/km
Loop resistance		61	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current (I <sub>eff</sub> )		4	A
Structural return loss (SRL)			

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Pierpaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable (Screening Class B)



Data Sheet

**SAT501**

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)	SA-Class B	Shield Transfer Impedance (Zt)	Zt-Class C
30 - 1000 MHz	>80 dB	5 - 30 MHz	< 23 mOhm/m
1000 - 2000 MHz	>80 dB		
2000 - 3000 MHz	>75 dB		


Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	2,30	862	23,30
10	2,80	1000	25,20
30	4,60	1750	34,00
50	5,60	2150	38,20
200	10,90	2400	40,40
300	13,70	3000	44,20
470	17,40		

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe B / B Class Cable**

Cavo tipo / Cable type : **SAT 501**

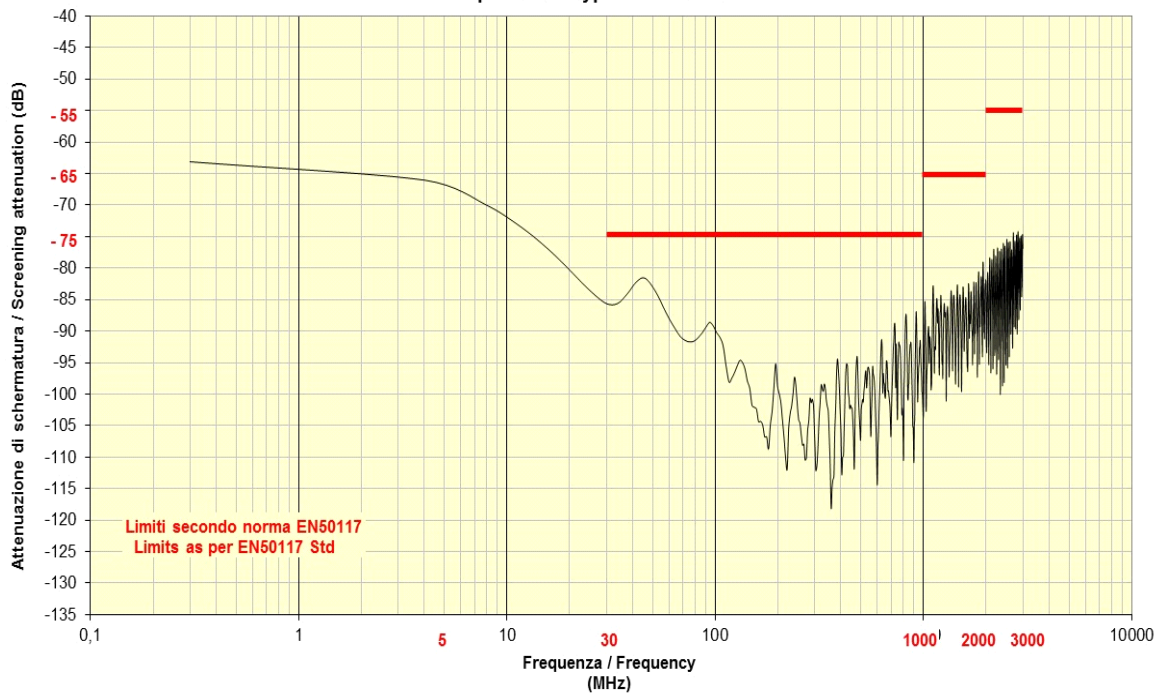

**Connectors**

- BNCC3.9C** Series BNC Compression, BNC Compression, for OUTDOOR installation
- BNCC501** Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Pierpaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable (Screening Class B)

**Data Sheet****SAT501****↑↑↑ Connectors**

- F501** Series F Crimp, Crimp F-59-ALM 3.9/6.4, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
- FA501** Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
- FC5.0QMS** Series F Compression, Short Quick Mount, for OUTDOOR installation
- FC501** Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
- FCEM5.0C** Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
- FCPO3.9C** Series F Compression, Ø 3,9 Push-On, for OUTDOOR installation, nitin-plated brass
- IECF905C** Series IEC (toolless), Ø 3,9 90° female, for INDOOR installation
- IECM905C** Series IEC (toolless), Ø 3,9 90° male, for INDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****Pierpaolo Piccinini**